


MF P508



MultiFaster 4 lines, size 08.

Applications

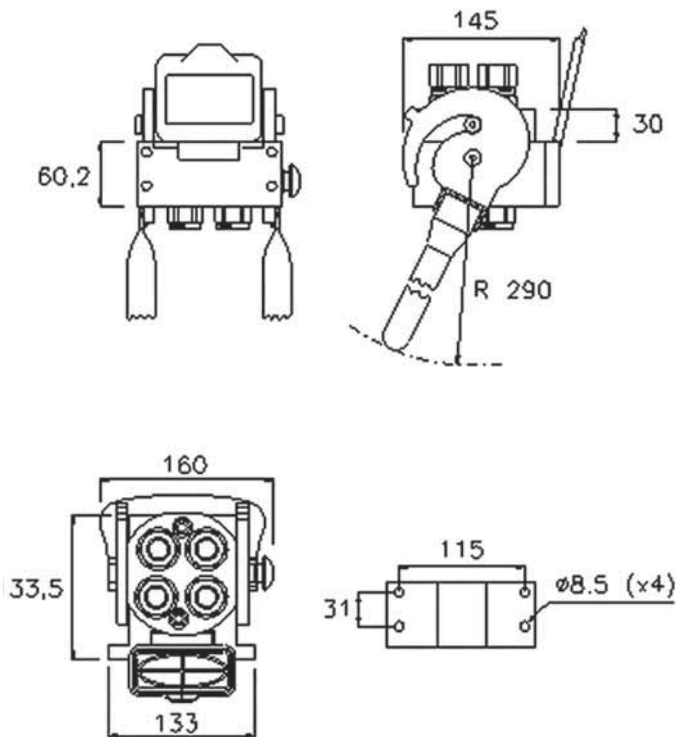

Technical Specifications

dash	Size mm inch	Working Pressure (MPa)	Flow Rate (l/ min)	Spillage (ml)	Burst pressure (MPa)		
					Male	Female	Male + Female
08	12.5 1/2"	25	70	0.01	100	100	100

Material	Aluminium; Steel
Seals	NBR; PUR
Working temperatures	- 25 °C to + 100 °C
Surface treatment	MATE 500 (CrIII); Paint

Valve Type	Flat
Connection	Lever
Disconnection	Lever
Connection Under Pressure	Allowed Residual

