## MF P608



MultiFaster 6 lines, size 08.


## **Applications**









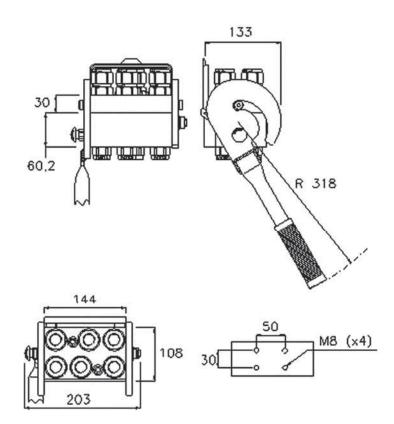

## Technical Specifications

						Burst pressure (MPa)		
dash	Size mm	inch	Working Pressure (MPa)	Flow Rate (I/ min)	Spillage (ml)	Male	Female	Male + Female
08	12.5	1/2"	25	70	0.01	100	100	100

Material	Aluminium; Steel
Seals	NBR; PUR
Working temperatures	- 25 °C to + 100 °C
Surface treatment	MATE 500 (CrIII); Paint

Valve Type	Flat	Flat		
Connection	Lever			
Disconnection	Lever			
Connection Under Pressure	Allowed Residual	<i>↔</i> □>□		