MF PS08


MultiFaster 5 lines, 4 lines size 08, 1 line with electrical connector.

MultiFaster suitable for 4+1 lines size 08. The additional line could be either an electrical connector or an hydraulic coupling.

Applications





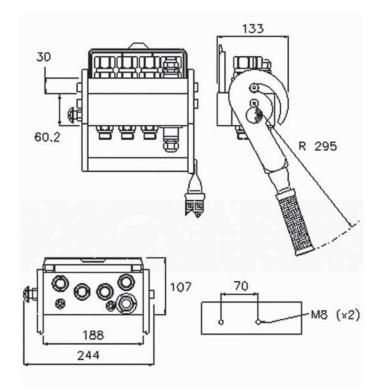

Technical Specifications

| | | | | | | Burst pressure (MPa) | | |
|------|------------|------|---------------------------|-----------------------|------------------|----------------------|--------|------------------|
| dash | Size mm | inch | Working Pressure (MPa) | Flow Rate (I/ min) | Spillage (ml) | Male | Female | Male + Female |
| 08 | 12.5 | 1/2" | 25 | 70 | 0.01 | 100 | 100 | 100 |

| Material | Aluminium; Steel | Valve Type | Flat | |
|----------------------|----------------------------|------------------------------|---------------------|---------------------|
| Seals | NBR; PUR | Connection | Lever | |
| Working temperatures | - 25 °C to + 100 °C | Disconnection | Lever | |
| Surface treatment | MATE 500 (CrIII); Paint | Connection Under Pressure | Allowed Residual | $\square > \square$ |